

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,008,802 B2
APPLICATION NO. : 09/870393
DATED : March 7, 2006
INVENTOR(S) : Zhimin Lu

Page 1 of 15

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

The title page showing an illustrative figure(s) 6, 7 and 11 should be deleted and substitute therefore the attached title page consisting of Figs. 6, 7 and 11.

The drawing sheets consisting of Fig(s) 1-12 should be deleted and substitute therefore the attached drawing sheets consisting of Fig(s) 1-12.

On page 1 of the Specification, in the Title, Delete "WATER" and insert --WAFER--, therefor.

In column 1, at line 2: Delete "WATER" and insert --WAFER--, therefor.

In column 8, at line 14: Delete "parameters" and insert --parameter f_i --, therefor.

In column 8, at line 16: Delete " p_1 ," and insert -- p_i --, therefor.

In column 10, at line 48: Delete " α_L " and insert -- Δ_L --, therefor.

In column 10, at line 48: Delete " α_R " and insert-- Δ_R --, therefor.

In column 10, at line 51: Delete "maybe" and insert --may be--, therefor.

In column 15, at line 50, in Claim 18: Delete " (p_1-p_1') " and insert -- $(p_i-p'_i)$ --, therefor.

In column 15, at line 61, in Claim 19: Delete " I_{\max} " and insert -- I_{\max} --, therefor.

In column 15, at line 61, in Claim 19: Delete " I_{\min} " and insert-- I_{\min} --, therefor,

In column 15, at line 63, in Claim 19: Delete " I_{\max} " and insert-- I_{\max} --, therefor.

In column 15, at line 63, in Claim 19: Delete " I_{\min} " and insert-- I_{\min} --, therefor.

In column 16, at line 25, in Claim 21: Delete " Θ_i ," and insert -- Θ_g --, therefor.

In column 16, at line 27, in Claim 21: Delete " Θ_x " and insert -- Θ_g --, therefor.

In column 16, at line 37, in Claim 22: After "in" delete "a".

In column 16, at approximately line 47, in Claim 22: Delete "axis" and insert --axis--, therefor.

In column 18, at line 12, in Claim 35: Delete "effector," and insert --effector;--, therefor.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,008,802 B2
APPLICATION NO. : 09/870393
DATED : March 7, 2006
INVENTOR(S) : Zhimin Lu

Page 2 of 15

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In column 18, at line 16, in Claim 35: Delete " v_1^- ," and insert -- v_i ;--, therefor.

In column 18, at line 21, in Claim 35: Delete "(c)" and insert --(e)--, therefor.

In column 18, at line 25, in Claim 35: After "system" insert --if--.

Signed and Sealed this

Sixteenth Day of January, 2007

A handwritten signature in black ink, appearing to read "Jon W. Dudas". The signature is stylized with a large, looping initial "J" and a distinct "D" at the end.

JON W. DUDAS
Director of the United States Patent and Trademark Office

(12) **United States Patent**
Lu

(16) Patent No.: **US 7,008,802 B2**
(45) Date of Patent: **Mar. 7, 2006**

(54) **METHOD AND APPARATUS TO CORRECT WATER DRIFT**

(75) Inventor: **Zhimin Lu, Mesa, AZ (US)**

(73) Assignee: **ASM America, Inc., Phoenix, AZ (US)**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(h) by 760 days.

(21) Appl. No.: **09/870,383**

(22) Filed: **May 23, 2001**

(65) **Prior Publication Data**

US 2004/0151574 A1 Aug. 5, 2004

(51) Int. Cl.
B01L 21/00 (2006.01)
B65H 1/00 (2006.01)
B01H 11/00 (2006.01)
G01C 25/00 (2006.01)

(52) U.S. Cl. **438/7; 414/936; 250/206.1; 350/622; 702/150**

(58) Field of Classification Search **438/5, 438/7, 14, 16; 250/252.1, 206.1, 206.2, 250/578.1, 234-236; 700/121; 702/87, 94-95, 702/150; 414/816, 936; 356/614, 615, 622**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,907,439 A 9/1975 Zanon
3,945,505 A 3/1976 Fribe et al.
4,024,944 A 3/1977 Adams et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 352 233 A1 4/1990
EP 0 313 466 A2 4/1989
EP 0 597 639 A1 3/1994

JP 59-055270 4/1984
JP 61-087352 3/1986
JP 61-184942 8/1986
JP 61-228609 10/1986
JP 63-073643 4/1987
JP 11-347975 12/1999
WO 99/52686 10/1999

OTHER PUBLICATIONS

Kun Petersen et al., "High-Performance Mass-Flow Sensor with Integrated Lamp-Flare Micro-Channels," *International Conference on Solid State Sensors and Actuators—Digest of Technical Papers* (1985), pp. 361-363.
UCA Corporation, (Wafertron006 Advertisement), *Solid State Technology*, vol. 28, No. 1, (Jan. 1985), p. 3.
Brooks Automation, (Wafer Handling Robot), *Solid State Technology*, vol. 28, No. 1, (Jan. 1985), p. 74.
Zbigniew M. Wojcik, "A Method of Automatic Centering of Chips, Masks and Semiconductor Wafers," *Electron Technology*, (1977), vol. 10, No. 3, pp. 79-96.
IBM Technical Disclosure Bulletin, "Automatic Mask/Wafer Alignment System," (Sep. 1985), vol. 28, No. 4, pp. 1474-1479.
IBM Technical Disclosure Bulletin, "Vacuum-Compatible Low Contamination Wafer-Orientor System," (Feb. 1986), vol. 28, No. 9, pp. 4056-4058.

(Continued)



Primary Examiner—Evan Part

(74) Attorney, Agent, or Firm **Koubits, Minerva, Olson & Bear, LLP**

(57) **ABSTRACT**

A method and apparatus is provided for determining workpiece drift from its nominal or intended position. The apparatus includes two proportionate sensors, each of which gives an output reading that depends upon how much of the sensor beam is blocked by an edge of the workpiece. A computer can calculate positional drift based upon these readings. Also disclosed is a method for aligning proportionate sensors to be parallel to one another.

45 Claims, 12 Drawing Sheets

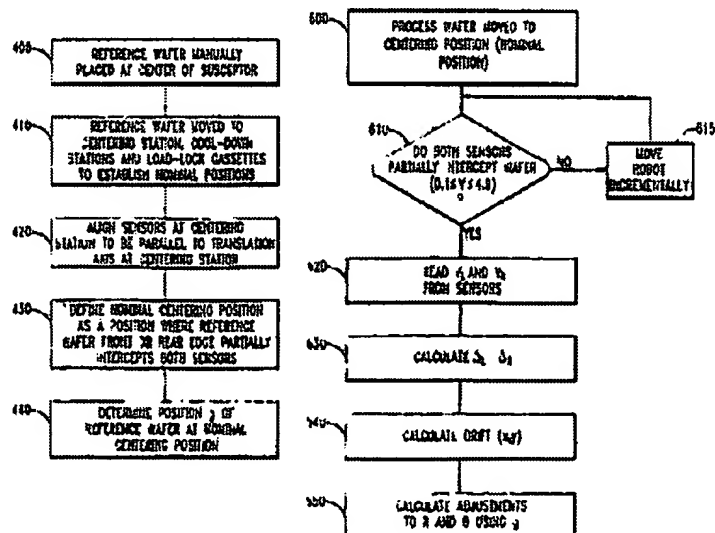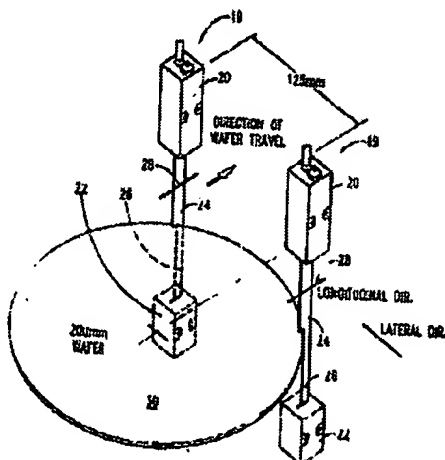

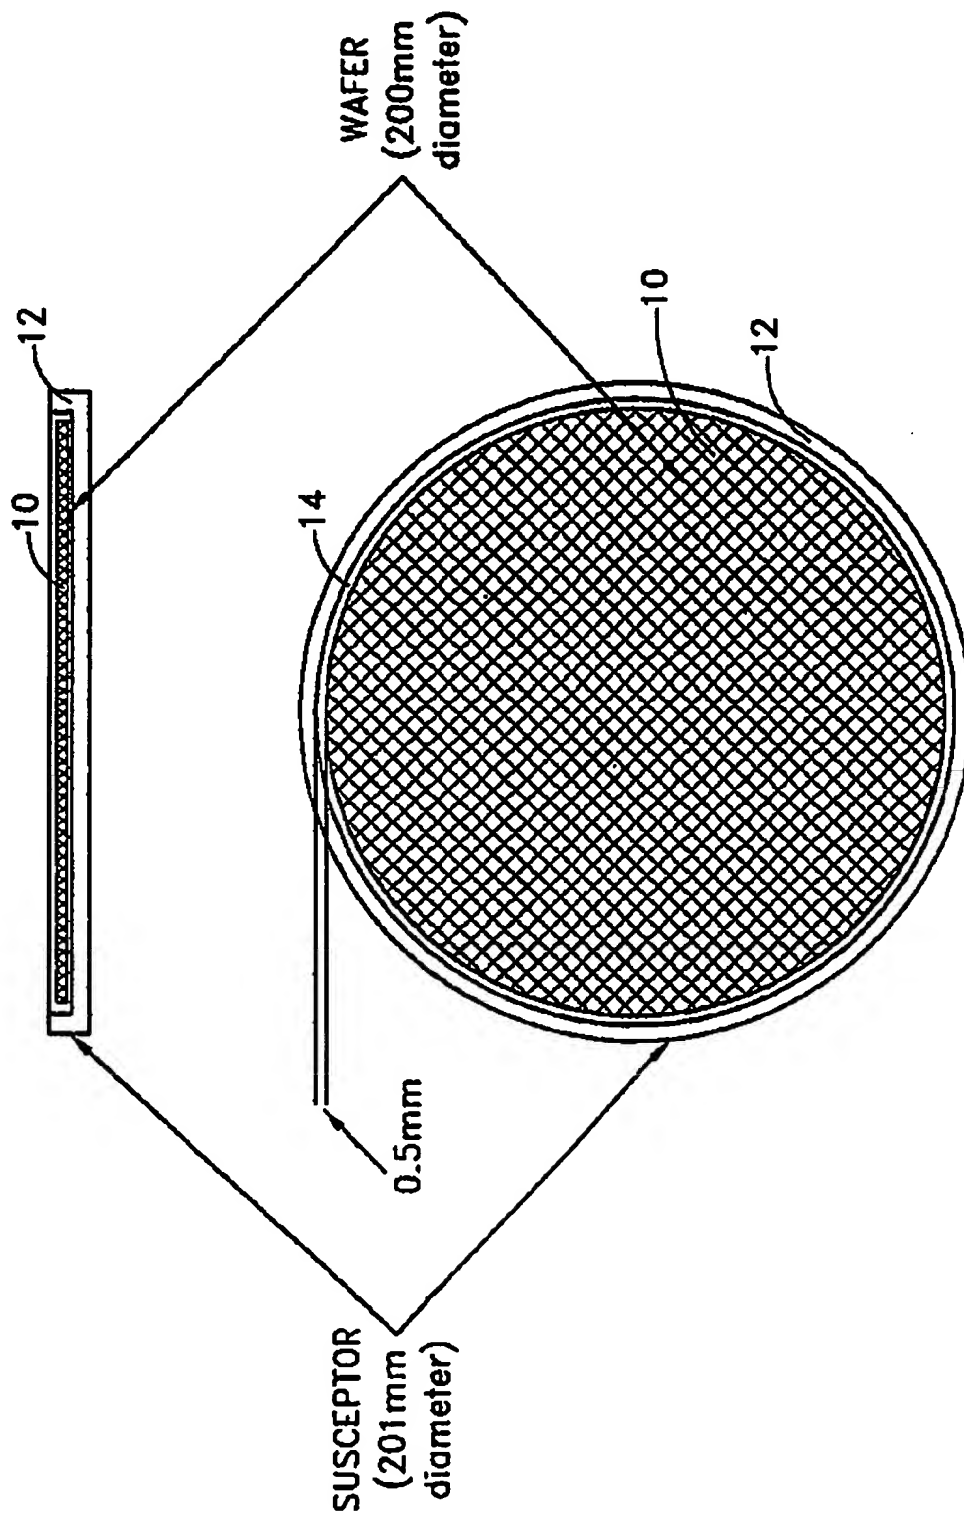


FIG. 1

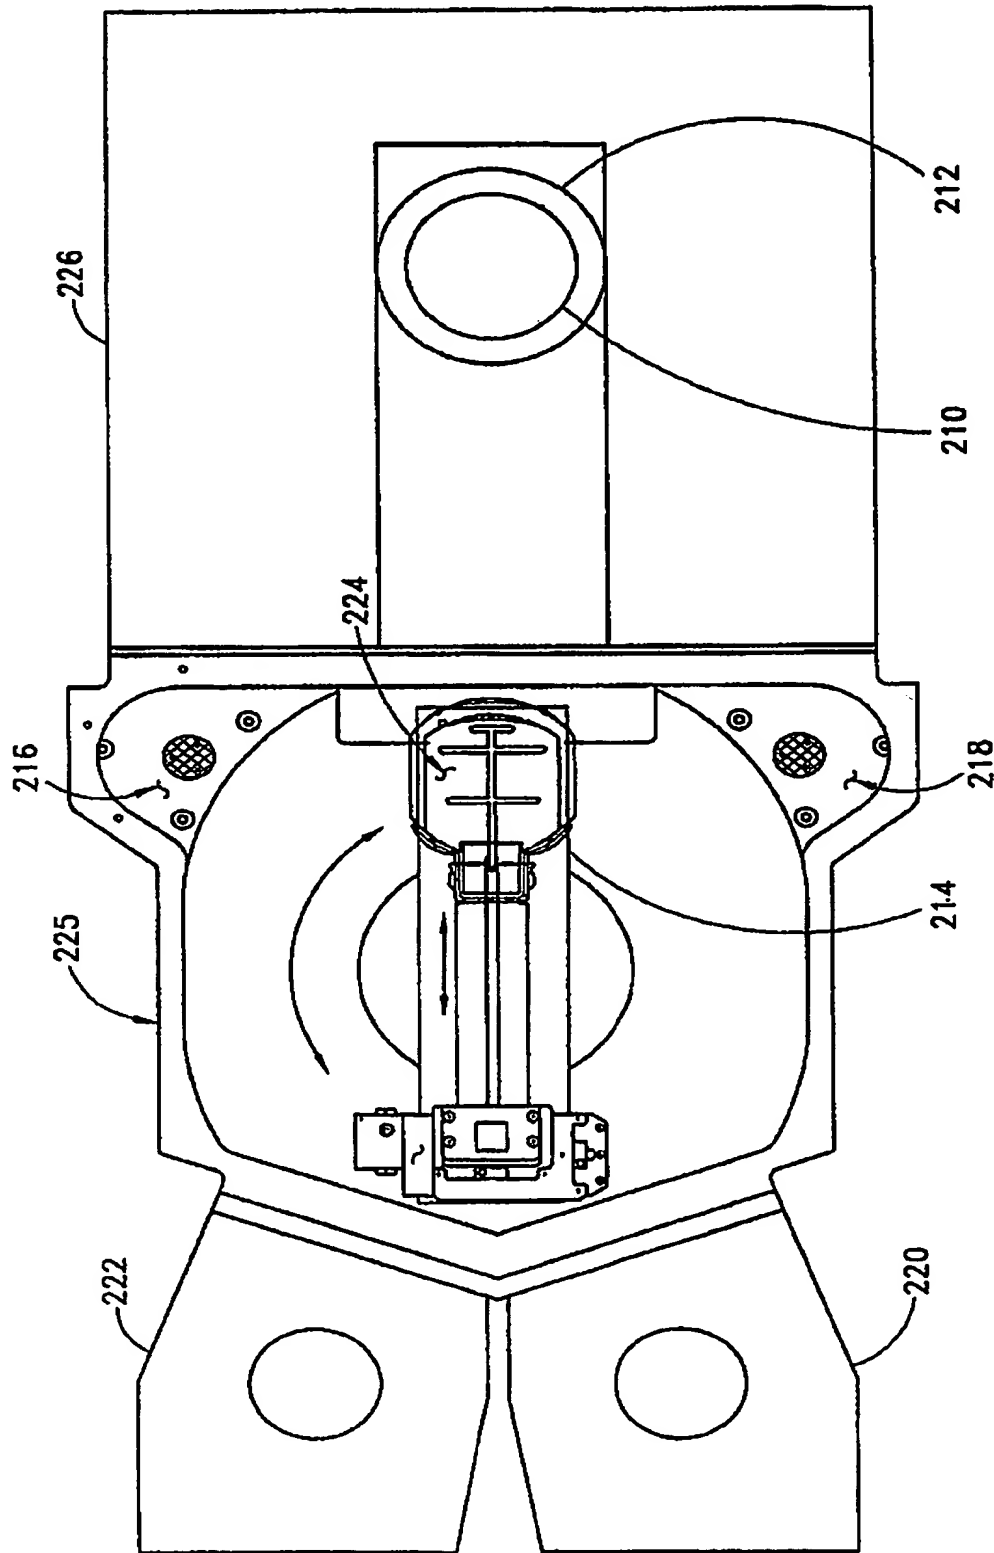
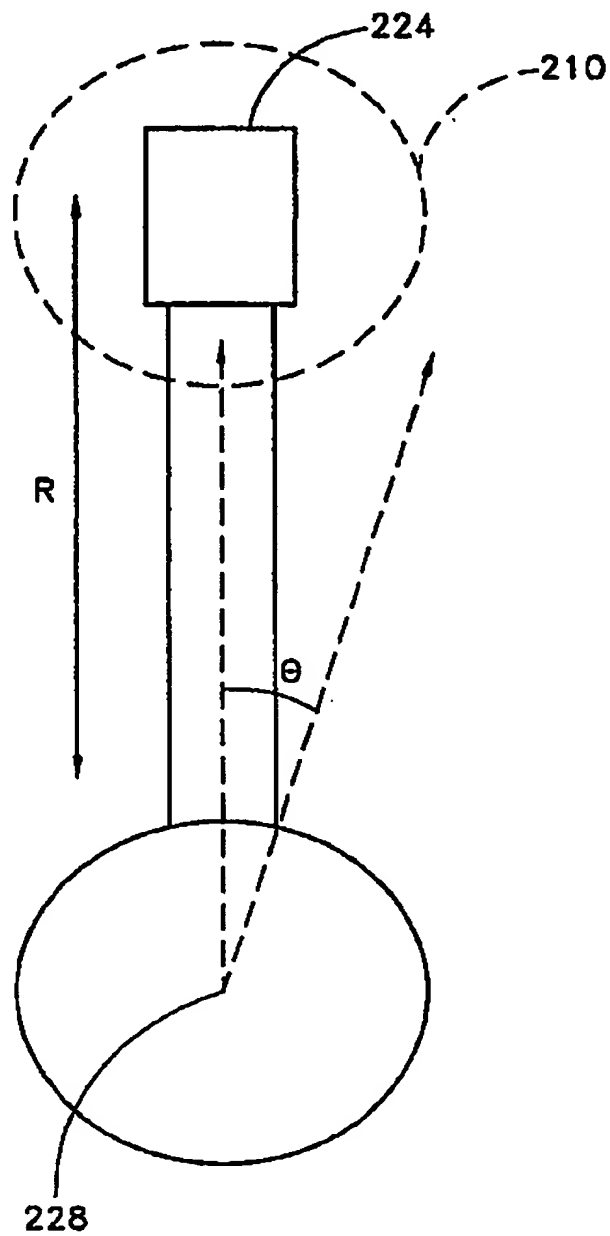


FIG. 2A

**FIG. 2B**

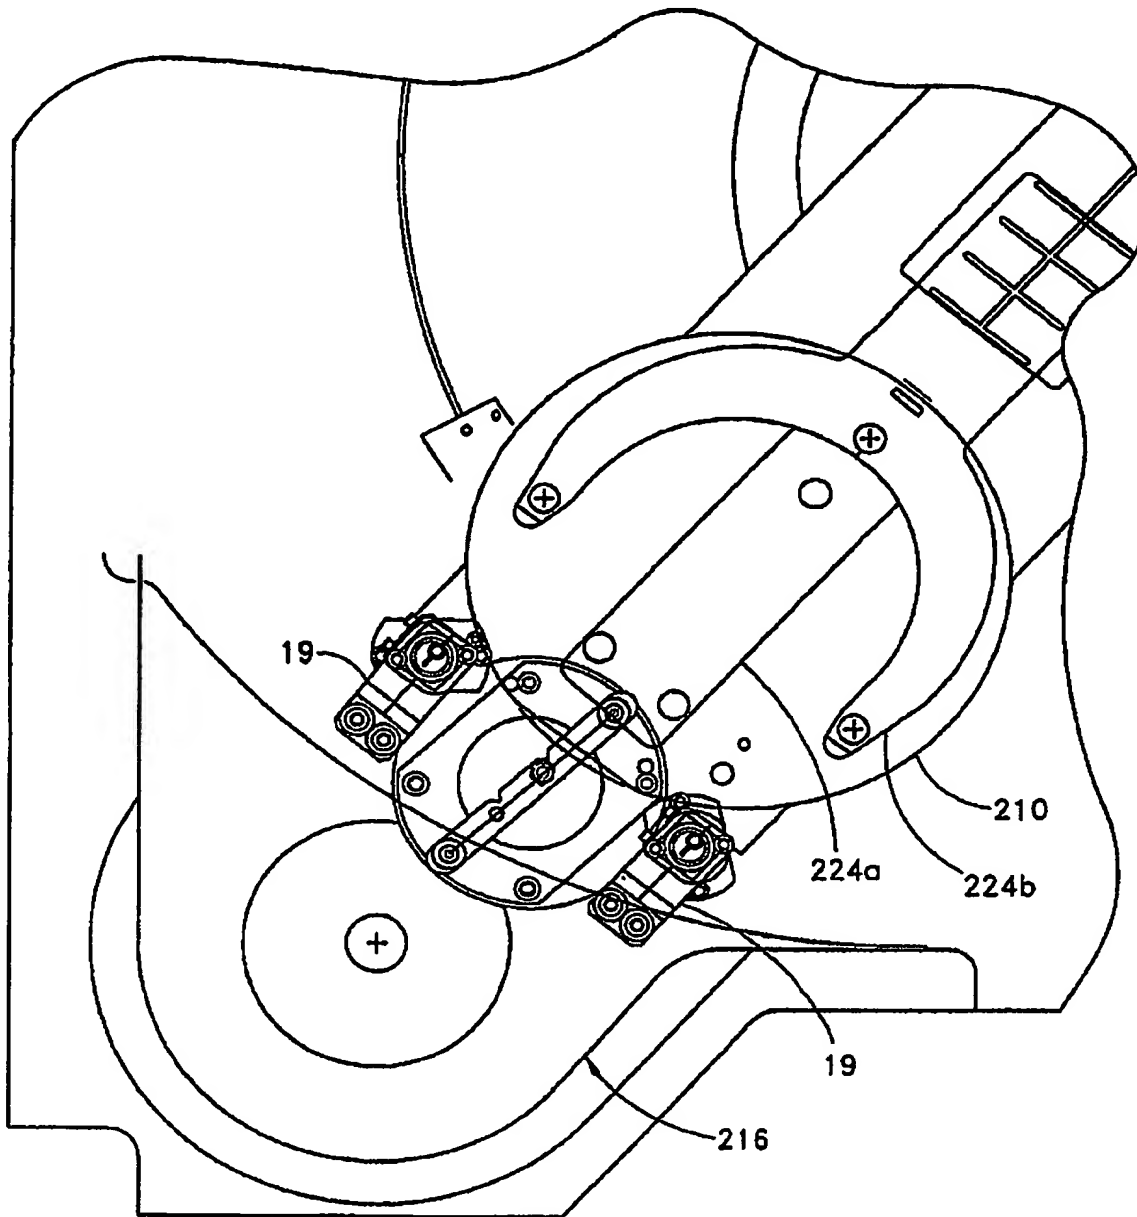
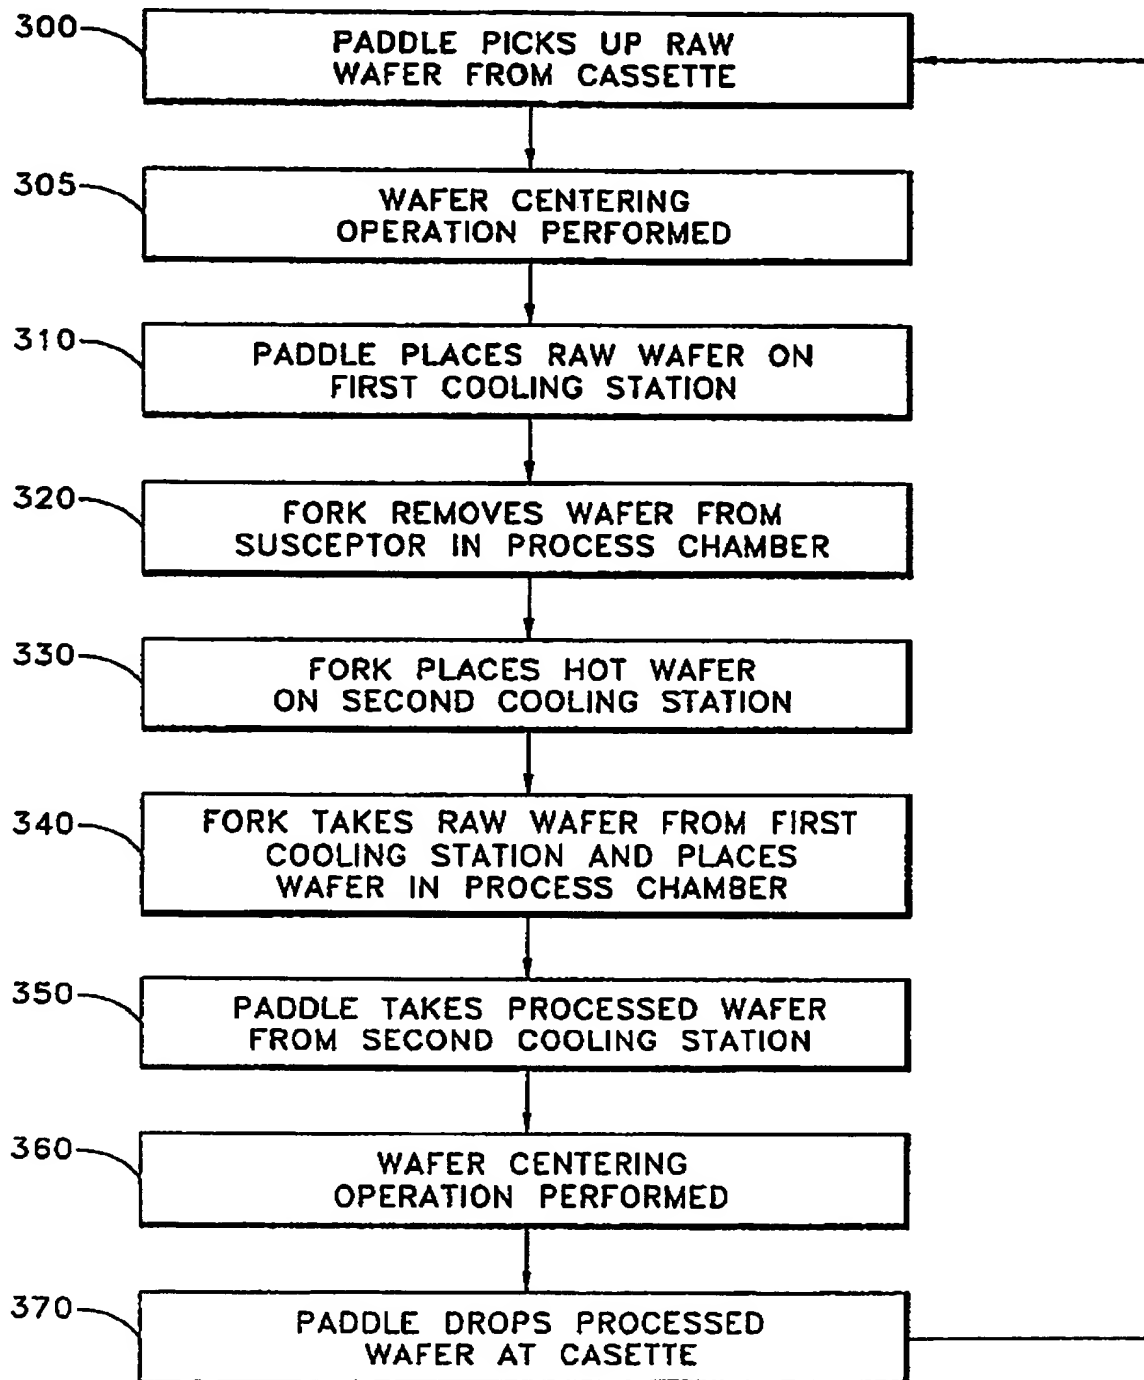


FIG. 2C

*FIG. 3*

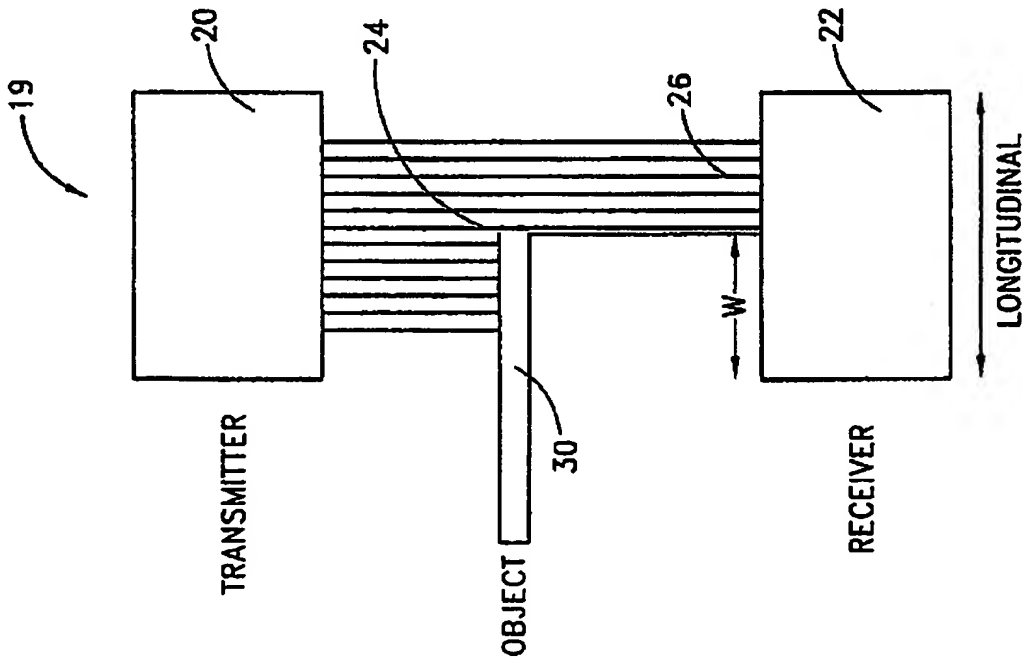


FIG. 4

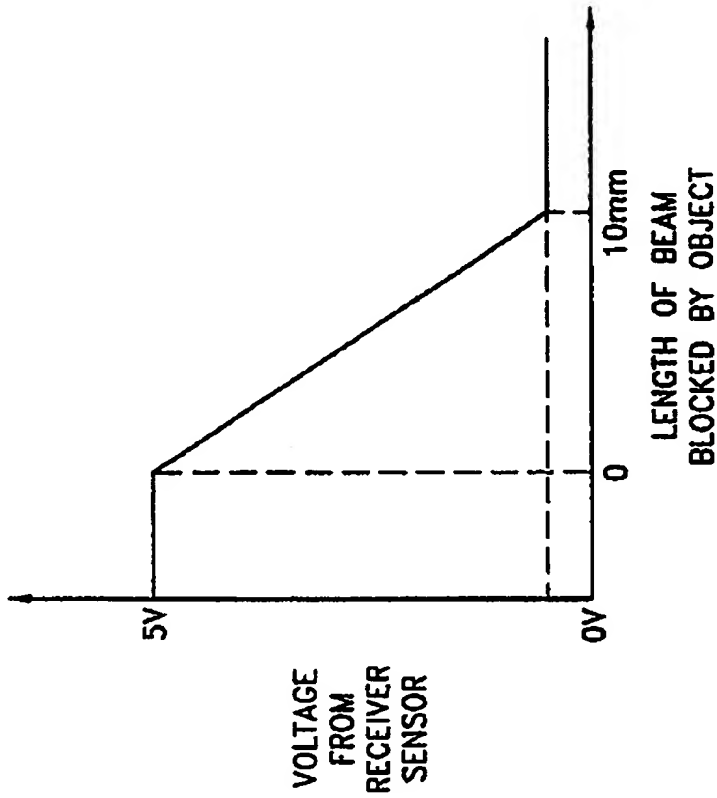


FIG. 5

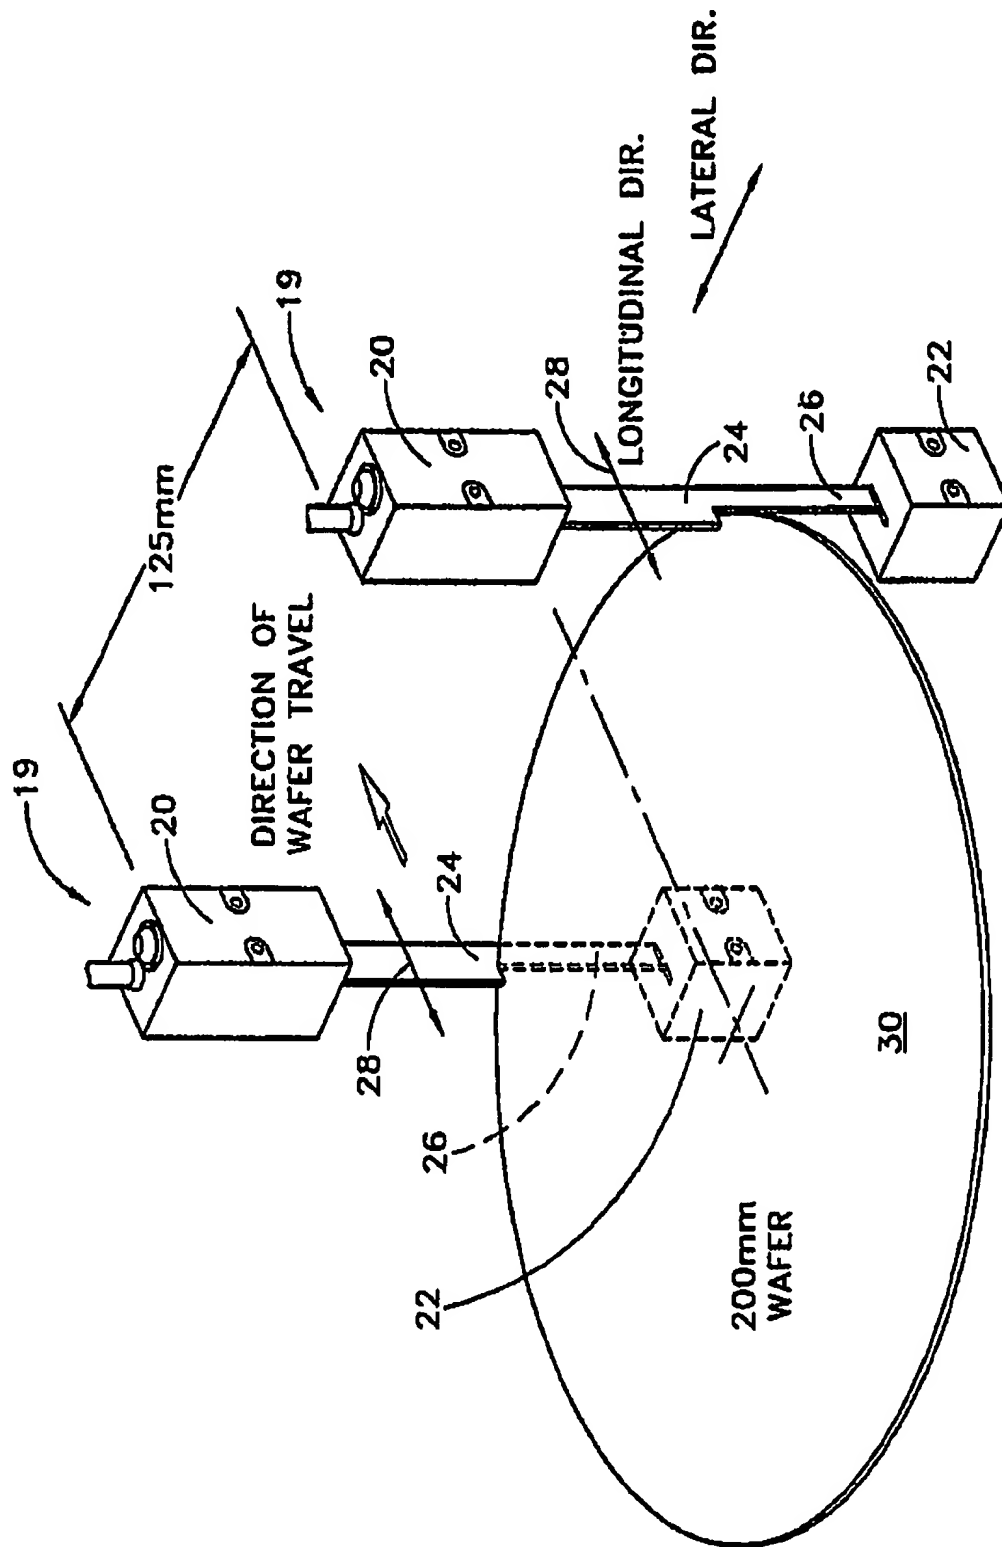
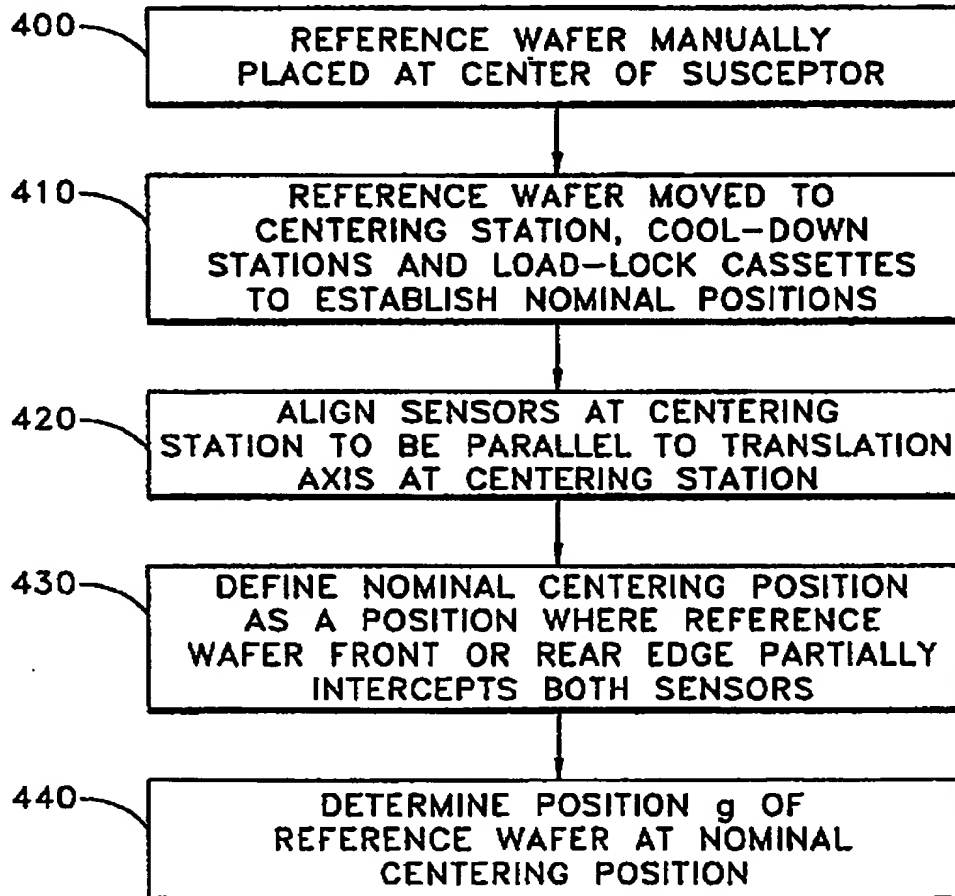


FIG. 6

*FIG. 7*

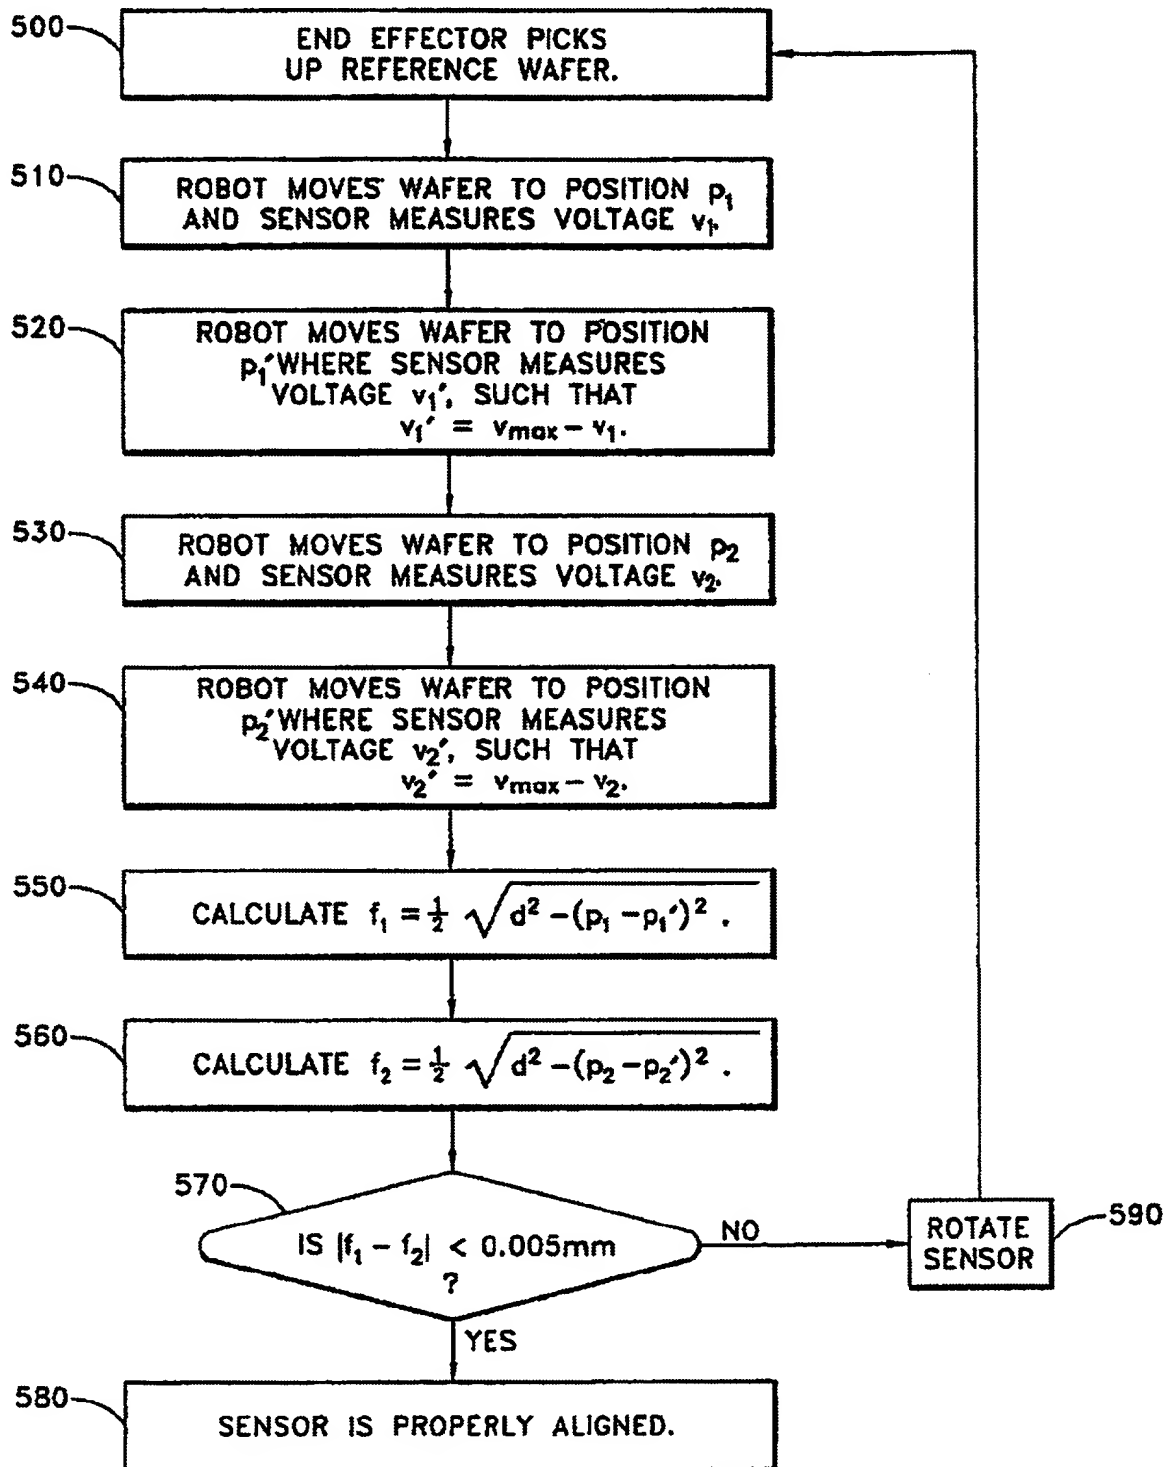


FIG. 8

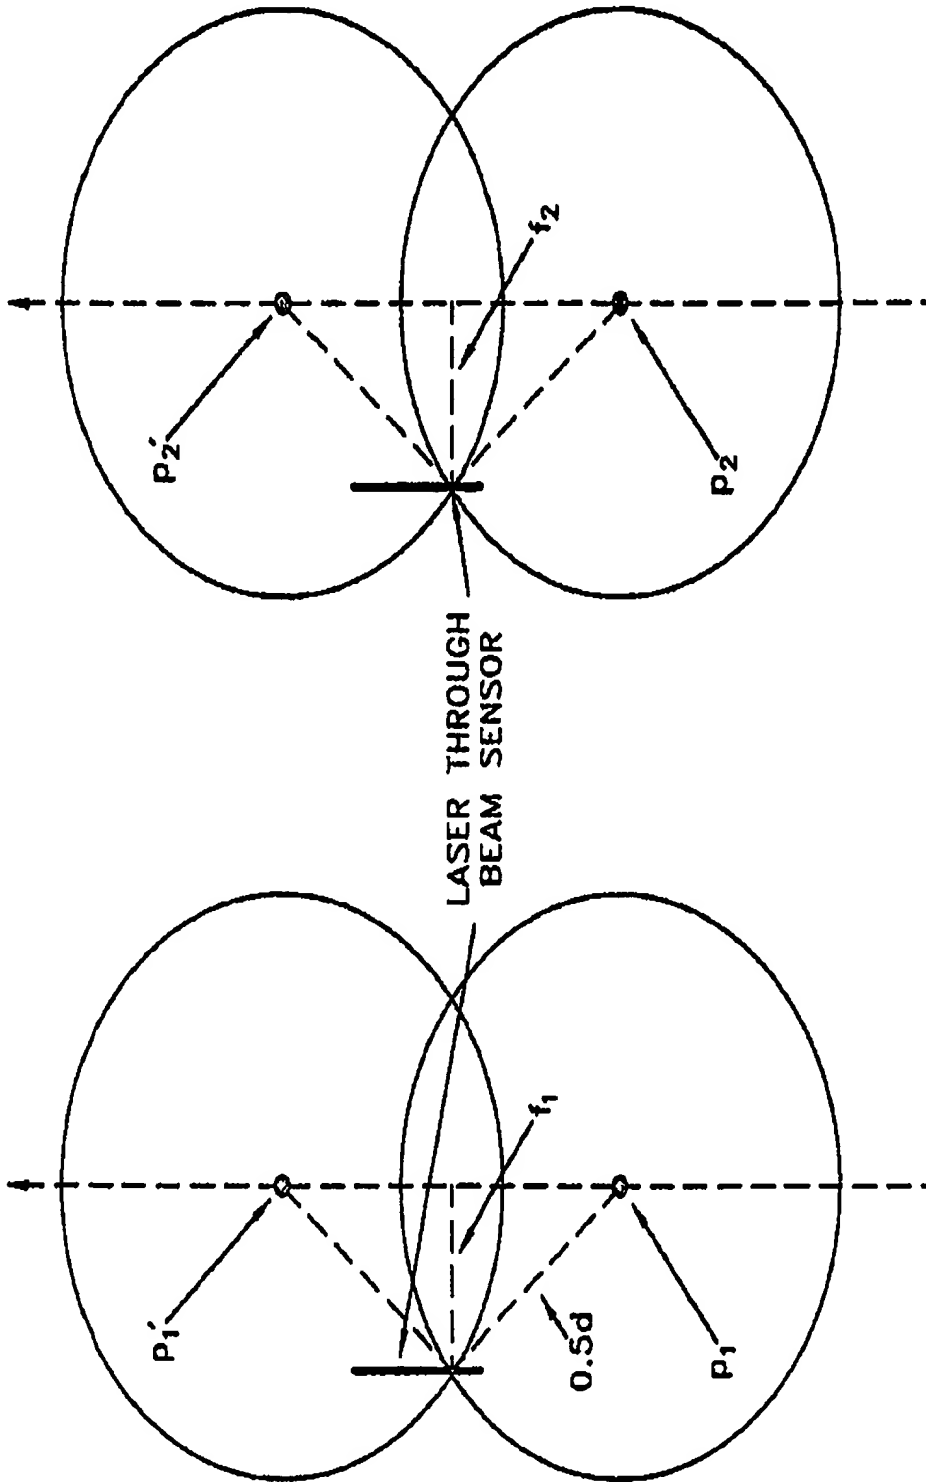
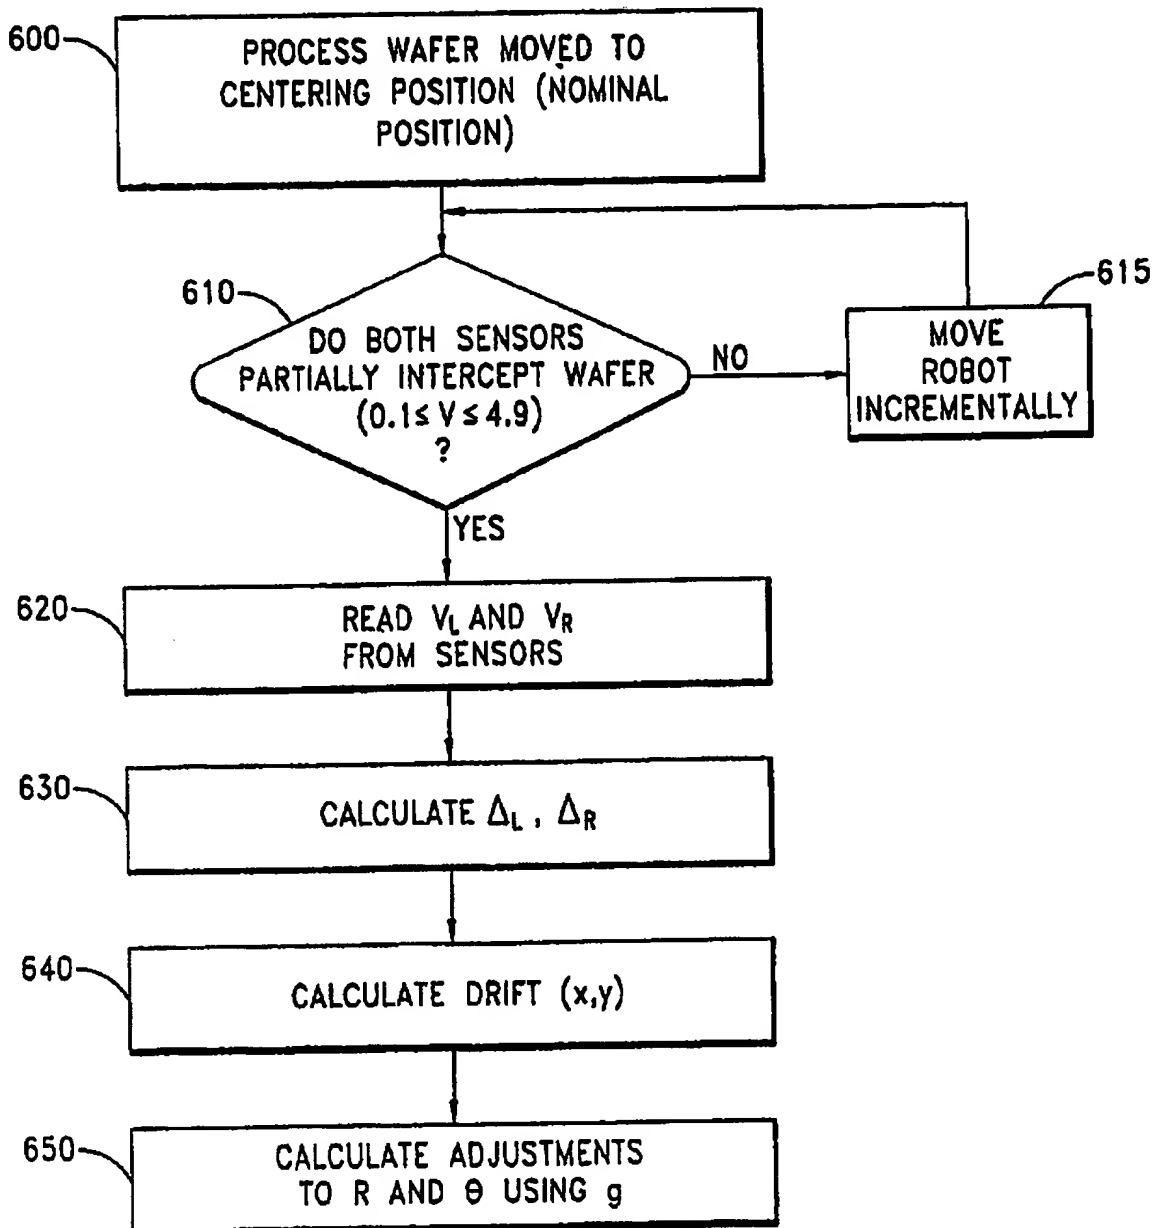


FIG. 10

FIG. 9

*FIG. 11*

WAFER POSITION/ERROR CALCULATION

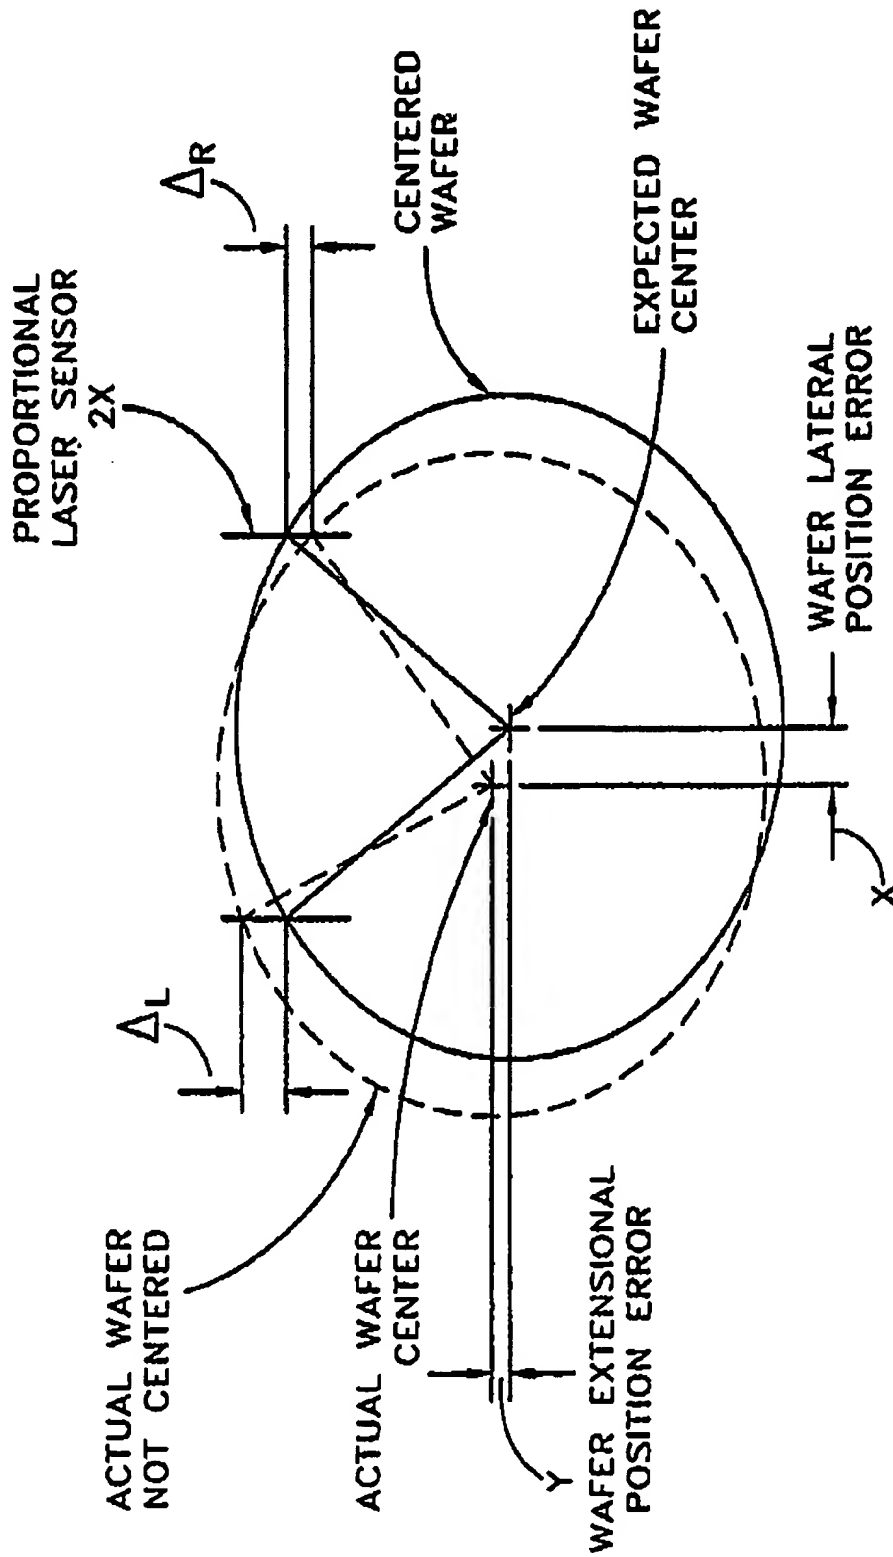


FIG. 12